



BOSCH
Invented for life

FLM-420-O1I1 Output-input Interface Modules




The FLM-420-O1I1 Output-input Interface Modules are fitted with one output to control external devices and with one monitored input.

They are 2-wire LSN elements for connection to the fire panels FPA-5000 and FPA-1200 and offer the enhanced functionality of LSN improved technology.

Functions

Semi-conductor output

The semi-conductor output is electrically isolated from the LSN loop and protected against short circuits.

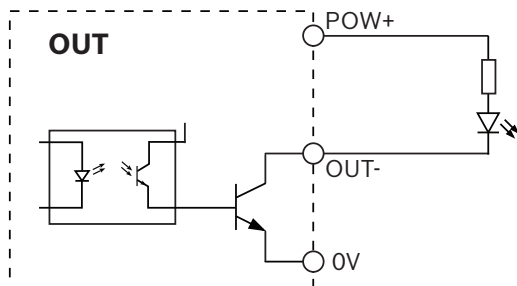

Functionality of the semi-conductor output

Output power supply

The power supply for loads connected to the output can be selected as:

- ▶ Semi-conductor output electrically isolated from LSN loop and short-circuit proof
- ▶ Max. switchable current per output 700 mA
- ▶ Individually selectable input monitoring functions (EOL or contact)
- ▶ Maintains LSN loop functions in the event of wire interruption or short-circuit thanks to two integrated isolators

- Auxiliary power supply from the fire panel
- External power supply units.

Input monitoring functions

The FLM-420-O1I1 Output-input-Interface Module provides two monitoring functions:

1. Monitoring of a line by an EOL resistor
2. Monitoring of a potential-free contact


The input monitoring functions can be selected by setting the corresponding addresses.

Line monitoring with EOL resistor

The EOL resistor has a standard resistance of 3.9 kΩ.

The interface module detects

- Standby
- Triggering in the event of a short circuit
- Triggering in the event of line interruption.

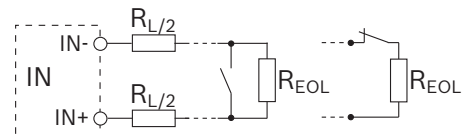

Position


Description

R_{Σ}	Overall line resistance with $R_{\Sigma} = R_{L/2} + R_{L/2} + R_{EOL}$
$R_{L/2}$	Line resistance

The following line conditions will be reliably detected if the overall line resistance is within the specified range:

Line condition	Overall line resistance R_L
Standby	1500 Ω to 6000 Ω
Short circuit	< 800 Ω
Interruption	> 12.000 Ω

Contact monitoring

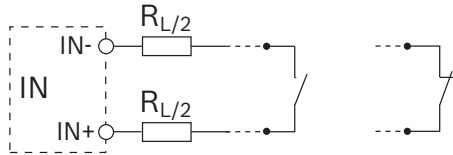

The interface module evaluates the operating conditions "open" or "closed". The normal operating condition can be programmed for each input. Contact monitoring has a pulse intensity of 8 mA.

Address switches

The address of the interface module is set using:

- DIP switches in case of the FLM-420-O1I1-E
 - Rotary switches in case of the FLM-420-O1I1-D.
- In improved version LSN mode, the operator can select automatic or manual addressing with or without auto-detection.

Address rotary switches	Address DIP switches	Mode
0 0 0	0	Loop/stub in improved version LSN mode with automatic addressing (T-taps not possible)
0 0 1 - 2 5 4	1 - 254	Loop/stub/T-taps in improved version LSN mode with manual addressing
CL 0 0	255	Loop/stub in LSN mode classic

LSN features

Integrated isolators ensure that function is maintained in the event of a short circuit or line interruption in the LSN loop. A fault indication is sent to the fire panel.

Features of LSN improved version

The interface modules in the 420 series offer all the features of improved LSN technology:

- Flexible network structures including T-tapping without additional elements
- Up to 254 LSN improved elements per loop or stub line
- Unshielded cable can be used

Interface variants

The Output-input Interface Modules are available in various designs:

- FLM-420-O1I1-E in-built version:
 - Suitable for standard device boxes according to EN 60670 and
 - For a space-saving installation in all devices.
- FLM-420-O1I1-D DIN-rail version:

- Suitable for installation on a DIN-rail according to EN 60715 with included adapter and
- For the FLM-IFB126-S surface-mounted housing.

Certifications and Approvals


Complies with

- EN 54-17: 2005
- EN 54-18: 2005 + AC:2007

Region	Certification
Germany	VdS G 209070 FLM-420-O1I1-E G 209069 FLM-420-O1I1-D
Europe	CE FLM-420-O1I1-E FLM-420-O1I1-D CPD 0786-CPD-20714 FLM-420-O1I1-E 0786-CPD-20715 FLM-420-O1I1-D
Hungary	TMT TMT-36/2010 szamu FLM-420-O8I2-S, FLM-420-O1I1-E, FLM-420-O1I1-D, FLM-420-RLE-S
	MOE UA1.016-0070232-11 FLM-420-O1I1-E UA1.016-0070263-11 FLM-420-O1I1-D


Installation/Configuration Notes

FLM-420-O1I1-D

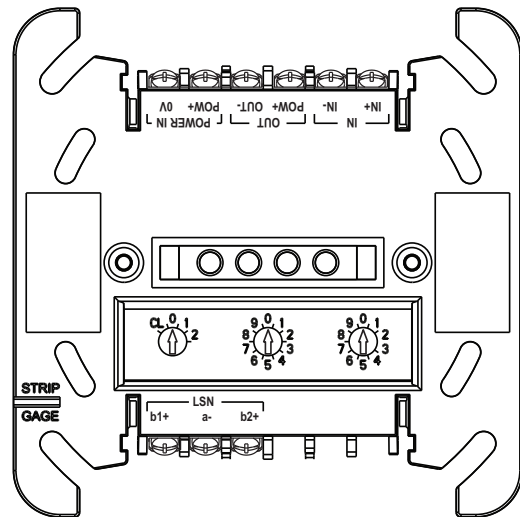

Description	Connection
IN	IN- IN+ Input 1
OUT	POW+ Reference potential (+)
	OUT- Output (switched negative potential)
POWER IN	POW+ 0V Power supply output
LSN	b1+ a- b2+ LSN (incoming / outgoing)

FLM-420-O1I1-E

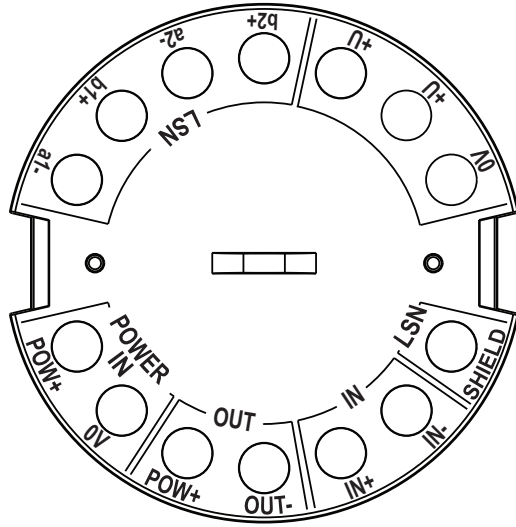

Description	Connection
POWER IN POW+ 0V-	Power supply (interface module and output)
OUT POW+ OUT-	Reference potential (+) Output (switched negative potential)
IN - +	Input
LSN SHIELD	Cable shielding (if available)
0V +U +U	Auxiliary power supply (support points to loop through)
LSN b2+ a2- b1+ a1-	LSN (incoming / outgoing)

- Can be connected to the fire panels FPA-5000 and FPA-1200.
- Programming is done with the programming software of the fire panel.
- The LSN connection is established by the two wires of the LSN line.
- The power supply for the output is either fed by the auxiliary power supply from the fire panel or by an external power supply unit. External power supplies must be free-of-ground.
- The outputs OUT/OUT- are switched against the negative potential of the interface module (POWER IN/ 0V). The positive potential (OUT/POW+) is either supplied by the auxiliary power (AUX) from the fire panel or by an external power supply unit.
- The maximum switchable voltage of the semi-conductor output is 30 V DC. The maximum switchable current is 700 mA (depending on the external power supply).
- The activation of the input IN has to be carried out electrically isolated from LSN (e.g. with relay contacts, pushbutton, etc.).
- The input must have a minimum activation time of 3.2 s.
- A maximum cable length of 3 m is permitted per input and output.

- The maximum cable length of all inputs connected to the loop or stub is 500 m in total. Additionally, all outputs which are not electrically isolated from LSN must be included in the total line length calculation (e.g. peripherals connected via C points). With UEZ 2000 LSN and UGM 2020, the limitation to 500 m applies to each Network Processing Converter (NVU).
- The interface module has terminals blocks to allow a second pair of wires to be looped through to supply the downstream connected elements with LSN power.
- For a fire system operation according to EN 54-2, the interface modules used for the activation of fire protection equipment and whose outputs are not monitored, must be installed directly next to or within the device which shall be activated.

Parts Included

Type	Qty.	Component
FLM-420- O1I1-E	1	Output-input Interface Module, in-built version
FLM-420-O1I1-D	1	Output-input Interface Module, DIN-rail version, with adapter and light pipe

Technical Specifications

Electrical

LSN	
• LSN input voltage	15 V DC to 33 V DC
• Max. current consumption from LSN	1.9 mA
Output	
• Max. switchable voltage of semi-conductor output	30 V DC
• Max. switchable output current	700 mA (depending on external power supply)
• External power supply	5 V DC to 30 V DC
Input	
Line monitoring with EOL	
• EOL resistor	Nominal 3.9 kΩ
• Overall line resistance R_{Σ} with $R_{\Sigma} = R_{L/1} + R_{L/2} + R_{EOL}$	- Standby: 1500 Ω to 6000 Ω - Short circuit: < 800 Ω - Line interruption: > 12.000 Ω
Contact monitoring	
• Max. current strength (current pulse)	8 mA
Minimum activation time of the input	3.2 s

Mechanical

Connections

- | | |
|------------------|--------------------|
| • FLM-420-O1I1-E | 14 screw terminals |
| • FLM-420-O1I1-D | 12 screw terminals |

Permissible wire diameter

- | | |
|-------------------|--|
| • FLM-420- O1I1-E | 0.6 mm ² to 2.0 mm ² |
| • FLM-420- O1I1-D | 0.6 mm ² to 3.3 mm ² |

Address setting

- | | |
|-------------------|-------------------|
| • FLM-420- O1I1-E | 8 DIP switches |
| • FLM-420- O1I1-D | 3 rotary switches |

Housing material

- | | |
|---------------------------------|--------------|
| • FLM-420- O1I1-E | ABS/PC blend |
| • FLM-420- O1I1-D incl. adapter | PPO (Noryl) |

Housing color

- | | |
|---------------------------------|---------------------------------|
| • FLM-420- O1I1-E | Signal white, RAL 9003 |
| • FLM-420- O1I1-D incl. adapter | Gray white, similar to RAL 9002 |

Dimensions

- | | |
|---------------------------------|---------------------------------------|
| • FLM-420- O1I1-E | Approx. 50 mm x 22 mm (Ø x H) |
| • FLM-420- O1I1-D incl. adapter | Approx. 110 x 110 x 48 mm (W x H x D) |

Weight

Without/with packing

- | | |
|-------------------|----------------------|
| • FLM-420- O1I1-E | Approx. 35 g / 170 g |
| • FLM-420-O2-D | Approx. 95 g / 390 g |

Environmental conditions

Permissible operating temperature	-20 °C to +65 °C
-----------------------------------	------------------

Permissible storage temperature	-25 °C to +80 °C
---------------------------------	------------------

Permissible rel. humidity	< 96% (non-condensing)
---------------------------	------------------------

Classes of equipment as per IEC 60950	Class III equipment
---------------------------------------	---------------------

Protection class as per IEC 60529	IP 30
-----------------------------------	-------

System limiting values

Maximum cable length input	3 m
----------------------------	-----

Maximum cable length output	3 m
-----------------------------	-----

Ordering Information

FLM-420-O1I1-E Output-input Interface Module with 1 open collector output and 1 monitored input, in-built version	FLM-420-O1I1-E
---	-----------------------

FLM-420-O1I1-D Output-input Interface Module with 1 open collector output and 1 monitored input, DIN-rail version	FLM-420-O1I1-D
---	-----------------------

Accessories

FLM-IFB126-S Surface-mounted Housing as retainer for the interface modules series 420 type DIN rail (-D) or spare housing for type surface-mount (-S)	FLM-IFB126-S
---	---------------------

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

Represented by